



The 2nd International Conference on Maritime Education and Training: The Role of Maritime Education and Training in Addressing Current and Future Challenges to Strengthen Contribution towards Sustainable Growth in Maritime Industry

**14 – 16 November 2018
Grand Mercure Hotel Jakarta
Sekolah Tinggi Ilmu Pelayaran**

**The 2nd International Conference on Maritime Education and Training:
The Role of Maritime Education and Training in Addressing Current and
Future Challenges to Strengthen Contribution towards Sustainable
Growth in Maritime Industry**

Sekolah Tinggi Ilmu Pelayaran (STIP) Jakarta

Steering Committee : Capt. Marihot Simanjuntak, MM
Capt. Egberth Djajasana, M.Pd

Chief Editor : Abdul Rachman, MM

Peer Reviewer : Dr. Antoni Arif Priadi
Dr. Mugen Sartoto, M.Sc
Dr. Tri Cahyadi
Dr. April Gunawan, MM.
Dr. Larsen Barasa, M.MTr.
Dr. Winarno
Dr. Silvy Nur Oktalina
Dr. Agus Tjahyono
Dr. Johny Malisan
Dr. Taryudi
Dr. Rukmini
Dr. Isran Ramli
Dr. Mustamin Alif
Dr. Putu Sudira
Dr. Ahmad Fauzi
Koes Pranowo

Editor and Layout : Arif Hidayat, S.Pel., MM
P. Nancy Lumban Batu, M.Hum.
Laila Puspitasari A.

ISBN : 978-602-993-817-3

Edition : Second, 2018

Publisher : STIP Jakarta
Jl. Marunda Makmur Cilincing
Jakarta Utara, Indonesia 14150

Telephone : +62-21-8891618 (Hunting)

Email : -webmaster@stipjakarta.ac.id

The role of mbc in flexible hose in increasing the safety of the process of cutting and prevention of hazards in sts condition in triputra lng ship <i>Suhartini, Bayu Sugiwo, Rr. Retno Sawitri Wulandari & Darul Prayogo</i>	139
A Study on Port Choice and Competitiveness: A Modeling Approach <i>Heru Susanto, Ari Yudha Lusiandri & Maulidiah Rahmawati</i>	149
Function of Electrical Electronics Engineering Adjusting to Types of Operation and Maintenance Function of Ship <i>Rukmini & Ahmad Wahid</i>	165
Analysis of Bitung Port Reliability in Succeeding Sea Toll Program <i>Oktavera Sulistiana, Meti Kendek, Nurwahidah & Subehana Rahman</i>	177
The Effect of Compensation on Ships Crew Performance of Floating Crane Ratu Giok-2 (Case Study at PT. Kartika Samudra Adijaya) <i>Larsen Barasa, Bambang Sumali, Purnama NF. Lumban Batu & Cardiana</i>	188
The importance of on-board training: a seafarer's perspective <i>Md. Humayun Kabir</i>	207
Calculation of Fuel Consumption through Flow meter on the Ship Based On ASTM-IP Tables <i>Bambang Wahyudi, Imam Fahcruddin, Denny Fitrial & Nafi almuzani</i>	218
Folk Ruler of the Sea as a Media for Maritime Education <i>Ridzky Firmansyah Fahmi, Tiya Antoni & lin Tjarsinah</i>	228
Passenger Satisfaction Analysis Of Service In Port Passenger Terminal Gresik <i>Larsen Barasa, April Gunawan, A. Chalid Pasyah & Riris Ariska</i>	237
Analysis of Reliability and Failure Risk of Ship - Machining System Using "FMEA" (Failure Mode Effects Analysis) In Mt. Arzu Ship <i>Yudi Satria</i>	256
Influence of the Weight of Practical Air in the Combustion Process on the Decrease in the Ship Main Propulsion Engine Performance <i>Jusak Johan Handoyo, Nafi Almuzani, M. Ridwan & Yuni Mariah</i>	266
Development of Learning Scenarios Using Marine High Voltage Simulator at Politeknik Pelayaran Surabaya	288

Analysis of Bitung Port Reliability in Succeeding Sea Toll Program

Oktavera Sulistiana

oktavaera@pipmakassar.ac.id

Politeknik Ilmu Pelayaran Makasar, Indonesia

Meti Kendek

metikendek@yahoo.co.id

Politeknik Ilmu Pelayaran Makasar, Indonesia

Nurwahidah

nurwahidah@yahoo.com

Politeknik Ilmu Pelayaran Makasar, Indonesia

Subehana Rahman

anarachman78@gmail.com

Politeknik Ilmu Pelayaran Makasar, Indonesia

Abstract. This research aimed to measure the reliability fulfillment of Bitung Port as the most Eastern port in Indonesian in succeeding the *Sea Toll program that it was launched by the government in the Working Cabinet Nawa Cita*. This research used qualitative descriptive research method. Data were collected by documentation, observation and interview techniques. The number of population was all reliability indicator components that determined by the National Development Planning Agency such as installed facilities, productivity level, effective documentation, data availability and information system, water entrance and inland transport then support institution of Bitung Port. Based on result of research, it was found that the six components of reliability that assessed at Bitung Port generally had fulfilled reliability criteria in supporting the Sea Toll Program, except Port Productivity component from the assessment aspect of Berth Output (BTP) and Gang Output which of experiencing trend of decreasing the quantity of load from year to year in Berth Output (BTP) calculation and no achieving of standard Gang Output which required to container transport at conventional wharf.

Key words: Sea toll, reliability, Bitung Port

Nowdays, sea transportation is the most reliable transportation for distribution of cargoes from Java to Eastern Indonesia, because sea transportation can distribute cargoes almost in all parts of Indonesia that are surrounded by large oceans. However, for its implementation, this transportation system is still not efficient and expensive in result of absence of back-load from areas with low economic growth that mostly occur in Eastern Indonesia. Transportation operational fee must endure the operational burden of fee for a two-ways trip because when the ship returns in empty.

Based on the conditions described above, the Government of President Joko Widodo and Vice President of Jusuf Kalla proclaim the Sea Toll program to realize Nawa Cita in point 3 that Building Indonesia from the periphery by strengthening regions and villages within the framework of the Unitary State, point 5 Improving the quality of life Indonesian people, point 6 Increasing people's productivity and competitiveness in the international market and point 7 Realizing economic independence by moving the strategic sector of the domestic economy. Sea Toll is the transportation concept of the maritim logistic that aims to serve continously from Sabang to Merauke by connecting large ports as a hub in the archipelago. By relationship between these sea ports, it can create smooth distribution of cargoes to remote areas. The idea of sea toll is an effort to realize the first Nawacita to strengthen identity as a maritime country and third Nawacita to build Indonesia from the periphery by strengthening regions and villages within the framework of a unitary state. Besides, the sea toll is also as an affirmation that ships can visit all regions in the country. Basically, the concept of sea toll transportation is proclaimed by the previous period of government with the term Pendulum Nusantara. Both of these transportation concepts require a system that is integrated with land and air infrastructure known as a multi-modal transport system. The existence of Sea Toll can also reduce the burden on the road so that road maintenance costs can be reduced. It is expected that sea tolls can reduce logistics costs, transportation costs become cheap and prices related to basic needs also decline significantly. Sea tolls will create new growth centers as a multiplier effect. To succeed the Sea Toll program, reliability is needed from each of the major port that function as a distribution hub. The port includes 5 ports, namely Kuala Tanjung Port (Medan, North Sumatra), Tanjung Priok (Jakarta), Tanjung Perak (Surabaya), Makassar and Bitung plus 1 economic buffer port specifically for Papua, namely Bintuni port (Sorong, West Papua). The reliability of a hub port is measured based on criteria 1) Installed Capacity, 2) Productivity Levels, 3) Effective Documentation, 4) Availability of Data and Information Systems, 5) Water entrance-inland transport, and 6) Supporting institutions.

Main Section Heading

The location of this research was Bitung Port, which was the most eastern Hub Port of Indonesia. This port was operated by PT. Pelindo IV including Container Terminals, Passenger Terminals and Conventional Terminals. The populations of this research were all components of port reliability indicators established by the National Development Planning Agency (IBRA) in the form of Installed Facilities, Productivity Levels, Effective

documentation, Availability of Data and Information Systems, Water entrance and inland transport, and Supporting Institutions of Bitung Port. The type of data used includes primary data, which was data taken directly by conducting observations and surveys at the port based on the indicators specified. Secondary data was obtained by collecting data through document study and literature taken from sources that related to research. The source was from PT. Pelindo IV as the operator of the port of Bitung and other library sources. The research method used a descriptive qualitative research method for collecting data through the techniques of documentation, observation and interview studies.

Therefore, the framework of problem solving approach is shown in Figure 1.

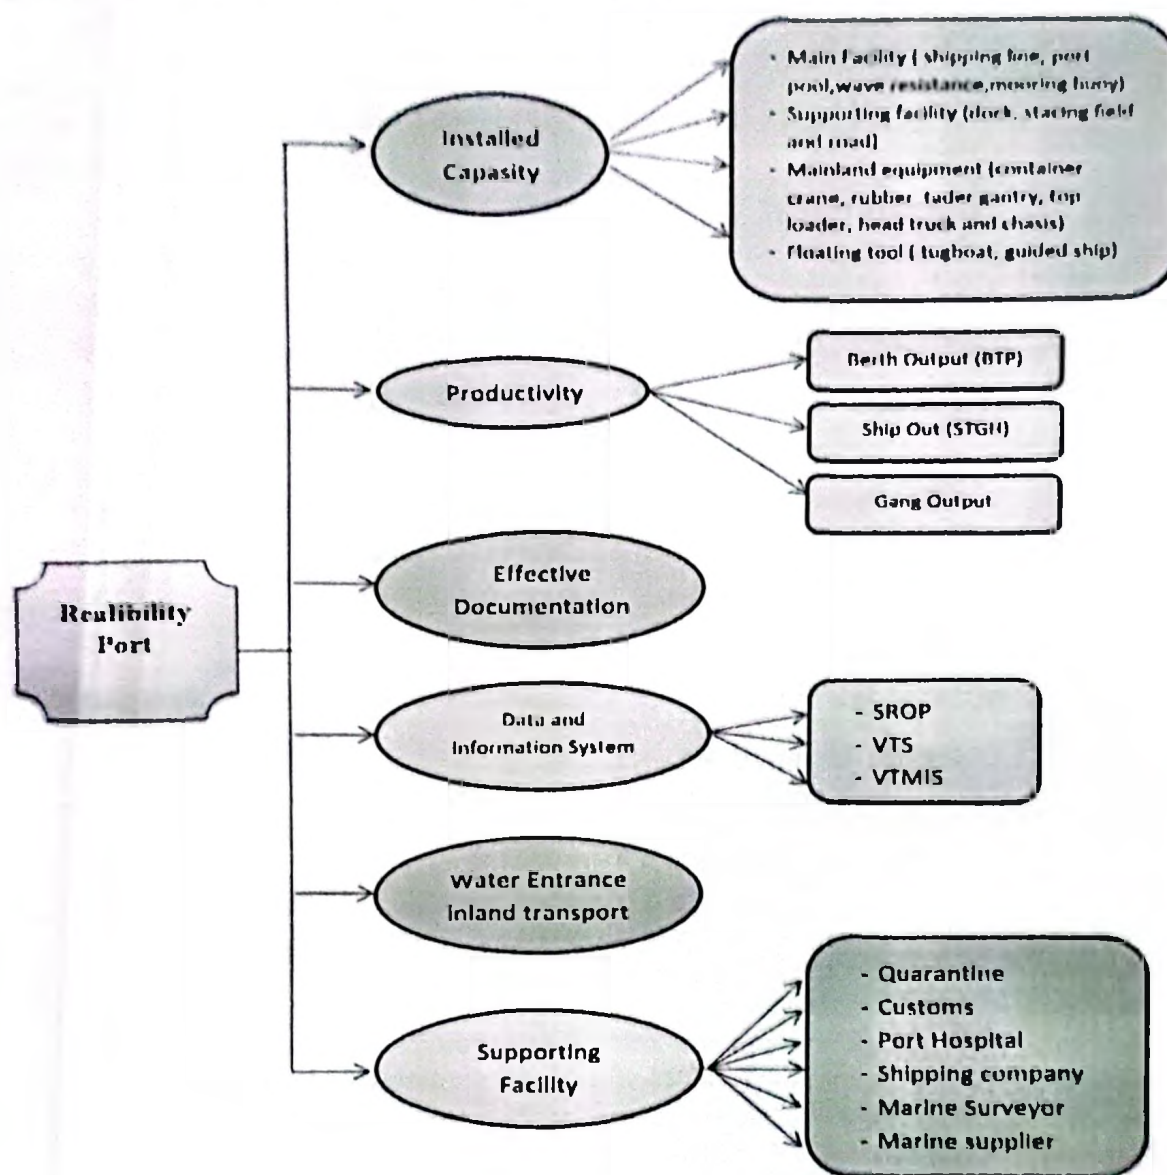


Figure 1. Framework

Result

This paper is presented in The 2nd International Conference on Maritime Education and Training, in Connection with The 2nd Global on Board Training Conference
14-16 November 2018, Jakarta, Indonesia

1. Installed Facility

The Length of fairway of the Port of Bitung was 9 miles and a width of 600 meters with a depth of 12 m LWS, where the highest installed was 1.8 m LWS and the lowest plug was 1.2 m LWS. With a groove width of 600 m, if it was connected with the provision that the minimum groove width is 7.6 width of the ship for the 2-lane shipping channel, then the Bitung Port could be crossed by ships with a width of 78.9 m. For drafts of ships that can pass through the shipping lane for LWS 12 m, it was possible for ships that pass the Bitung shipping lane to a maximum draft of 10 m, a maximum of 8.9 m at the lowest tide and a maximum of 11.6 m at the highest tide. The following was data on installed facilities at Bitung Port:

Table 1.1. List of Bitung Port Mooring Facilities

No.	Wharf	Length (m)	Deep (MLWS)
1.	Samudera Wharf		
	a. Samudera I	190	9
	b. Samudera II	243	10
	c. Samudera III	175	10
2.	IKD Wharf	146	7
3.	Nusantara Wharf		
	a. Nusantara I	251	6
	b. Nusantara II	148	5
	c. Nusantara III	207	6
4.	Local Wharf	60	6
5.	LCT Wharf	20	7
6.	Container Terminal Wharf	358	11

From the table, it could be seen that the depth of the berth mooring facility in Bitung port on MLWS was located at the Container Terminal Wharf. It was 11 m which allowed the fully cellular generation vessel with a carrying capacity of up to 2500 TEUs, while the lowest depth was 5 m at Nusantara 2 jetty which allowed Pelni passenger ships with drafts of up to 3.5 m and feeders to lean there.

a. Floating Tool

Table 1.2. List of Bitung Port Floating Tools

No.	Vessel Name	Capacity
1.	Pilot Boat	3 unit
	a. MPS Siladen	(2 X 130 HP-6 KNOT)

	b. MPI Sarena	(2 X 300 HP-8 KNOT)
	c. MPC Aerprang	(2 X 350 HP-25 KNOT)
2.	Tug Boat	2 unit
	a. TB Bunaken	(2 X 750 PS)
	b. TB Todano	(2 X 1000 HP)

Floating equipment facilities at Bitung Port Included 3 Pandu Ships with speeds ranging from 6 to 25 knots. For other facilities, it consisted of two tugs with a power of 750 and 1000 HP which use each two engines. By the assumption that the length of the delay service for 1 ship taking 15-30 minutes, the existing facilities was possible to serve more than 48 ships that are required to delay overnight.

b. Cargo Service Facilities

Table 1.3. List of Cargo Service Facilities at Bitung Port

No.	Facility	Measurement	Amount
1.	Wharf		
	a. Samudera Wharf	M ²	6.955
	b. IKD Wharf	M ²	2.920
	c. Nusantara Wharf	M ²	8.130
	d. LCT Wharf	M ²	200
	e. Local Wharf	M ²	600
2.	Warehouse		
	a. Warehouse A	M ²	4.320
	b. Warehouse D	M ²	4.320
	c. Butler Warehouse	M ²	432
3.	Stacking Yard	M ²	43.414
4.	Electricity (PLN)	KVA	555
5.	Generator	KVA	500
6.	Water (PDAM)	T/J	MAX.200
7.	Bunker	T/J	MAX.150

Cargo service facilities included five wharf consist of Samudera Wharf, IKD Wharf, Nusantara Wharf, LCT Wharf and Local Wharf with a total of 18,805 m², three warehouses consist of Warehouse A, Warehouse B and Butler Warehouse with a total area of 9,072 m², a stacking area of 43,414 m², electricity with PLN sources with a capacity of 555 kVA supported by the availability of 500 kVA capacity generator, freshwater filling facilities with maximum pump speed 200 tons / hour and bunker facilities with a maximum rate of 150 tons / hour

c. Loading and Unloading Equipment Facilities

For loading and unloading services, the facilities owned by the Port of Bitung Included 1 reach stacker with a carrying capacity of 45 tons, 1 land crane with a capacity of 25 tons, three forklifts with capacities of 2.3 and 5 tons respectively, two pieces with a capacity of 7 tons, 3 truck heads with a capacity of 30 tons each, 2 tron-ton pieces with a capacity of 18 tons each, 2 chassis 20 feet, 3 chassis 40 feet and 1 fire truck ready to extinguish the fire around the port area with transport capacity of 5 tons as shown at Table 1.4, below:

Table 1.4. List of Bitung Port Loading and Unloading Equipment Service Facilities

Facilities	Amount	Capacity
Reachstaker	1	45 Ton
Shore Crane / Container Crane	1	25 Ton
Forklift	1	2 Ton
Forklift	1	3 Ton
Forklift	1	5 Ton
Forklift	2	7 Ton
Head Truck	3	30 Ton
Tronton	2	18 Ton
Chasis	2	20 Feet
Chasis	3	40 Feet
Mobil Pemadam Kebakaran (PMK)	2	5 Ton

d. Passenger and Visitor Service Facilities

For the convenience of passengers at Nusantara Wharf, Bitung Port prepared a two-storey passenger terminal with a total capacity of 1,780 people with 1040 seats in a room with a total area of 2544 m². Each floor was equipped with AC, TV, Toilet and Wi-Fi networks. easily accessed. For parking, a land area of 2,100 m² had been prepared for 4-wheeled vehicles and 294 m² for 2-wheeled vehicles as showed below:

Table 1.5. List of Passenger and Visitor Service Facilities in Bitung Port

No.	Facilities	Capacity
1.	Passenger Terminal 1 st Floor	1.272 m ²
	a. Person	1.060 org
	b. Seat	720 seats
	c. AC, TV, Toilet, Wi-fi	available
2.	Passenger Terminal 1 st Floor	1.272 m ²
	a. Person	1.060 org
	b. Seat	320 seats
	c. AC, TV, Toilet, Wi-fi	available

3.	Parking Area for 4-wheeled vehicles	2.100 m ²
4.	Parking Area for 2-wheeled vehicles	294 m ²

e. Security Facilities

In terms of security facilities, Bitung Port as an international hub had fully implemented the International Ship and Port Facility Security Code (ISPS Code) which required CCTV, metal detectors, access card systems and mirror detectors at each port entry access. In addition, it is also equipped with a safety fence, radio communication, AIS live, Fire Fleet and Rescue also collaborates with a port security unit consisting of KPPP, KPLP and Navy from Lantamal VIII in the Bitung area as showed at Table 1.6. below:

Table 1.6. List of Bitung Port Security Facilities

No.	Facility	Location
1.	CCTV	Passanger Terminal Gate/Pos 4 (entry gate) Gate/Pos 1 (exit gate) Stacking Yard
2.	Metal Detector	Entry Gate
3.	Access Card System	Entry Gate
4.	Mirror Detector	Entry Gate
5.	Security Border/Railing	All area
6.	Radio Communication	Navigation Control Station
7.	AIS Live	Navigation Control Station
8.	Fire Rescue	Bitung Port Area
9.	Security Board	
	a. KPPP (Harbour Police)	Bitung Port Area
	b. KPLP (Coast Guard)	Bitung Port Area
	c. Angkatan Laut (Navy)	Bitung Port Area

2. Port Productivity

a. Berth Output (BTP)

Findings about Berth Output showed a significant trend of decreasing the number of cargoes and BTP values in 2012 to 2013 and continuing to decline until 2016. Throughout the year the assessment from 2012-2016 had no addition long Wharf but BTP values continued to decline. This was a problem for the port of Bitung in supporting the Sea Toll program, so that attention was given to maintain the

continuity of the flow of cargoes in the Port of Bitung so that the function of the sea toll could occur as showed below:

Table 2.1. List of Berth Output (BTP) of Bitung Port in the last 5 years

Year	Cargo Amount (Ton)	BTP (Ton/M)
2012	4.310.163	723,00
2013	4.246.946	121,621
2014	3.454.859	73,37
2015	2.635.892	66,11
2016	1.827.676	59,30

b. Ship Output

The findings of Ship Output on Bitung Port showed the trend of increasing the number of cargoes and STP values on ships with Foreign line ship in 2013 and 2016 compared to STP on Domestic Line Ship shipping. This showed that the Port of Bitung functioned as an international hub port.

The value of Ship Output on 2012 until 2016 as showed at Table 2.2. below:

Table 2.2 List of Ship Output (STP) of Bitung Port in the last 5 years

Year	STP (ton per ship per hour in port = $T/K/J$)	
	Foreign Line Ship	Domestic Line Ship
2012	110,00	100,00
2013	818,94	285,86
2014	773,01	273,39
2015	714,31	243,79
2016	1.025,61	238,43

c. Gang Output

Productivity Standards of Port for Ton/Gang/Hour in accordance with the Decree of the Director General of Sea Transportation UM.002/38/18/DJPL-11 concerning Port Operational Performance Standards for Bitung port is 20 Ton/ Gang/Hour. The results of the 2012-2016 achievements for the Output Gang at Bitung port showed good standard for both Foreign Line Service and Domestic Line Service, except for

achievements in conventional terminals that were far below the minimum required as showed below:

Table 2.3. List of Gang Output of Bitung Port in the last 5 years (T/G/J or B/G/J)

Type of Ship or Line Service	Gang Output (Ton/Gang/hour OR Box/Gang/hour)				
	2012	2013	2014	2015	2016
A. Foreign Line Service (Export-Import)					
1. General Cargo Ship (T/G/H)	22,00	22,64	22,31	22,65	22,63
2. Other Cargo (T/G/H)	23,00	23,29	22,27	22,35	22,32
B. Domestic Line Service					
1. General Cargo Ship (T/G/H)	21,00	22,26	22,21	22,09	22,06
2. Other Cargo (T/G/H)	20,00	22,28	22,75	22,48	22,76
C. Container Ship (B/C/H)					
1. Container Terminal	22,00	24,00	24,00	24,00	24,00
2. Conventional Terminal	12,00	12,00	12,00	12,00	12,00

3. Effective Documentation

Recognition and certification of ISO 9001 edition in 2015 was real evidence that the Port of Bitung represented by PT. Pelindo IV Bitung Branch as a Port Business Entity that functions as a port operator had a strong commitment in guaranteeing its service quality standards. By the guarantee of quality standards, effective documentation in port operations would be fulfilled. Pillars in service quality assurance included service quality policies, service quality procedures, documentation and records of all service activities carried out. Documentation effectiveness at Bitung Port was also supported by effective documentation in the Inaportnet System which was a breakthrough in data management and port information systems that strongly support the existing Sea Toll program.

4. Data and Information Systems

To ensure the reliability of a port, the existence of data and information systems for the benefit of shipping safety and for flow of cargoes was a demand that must be fulfilled. The launch of the Inaportnet system on August 8, 2017 for Bitung Port was a breakthrough and a guarantee of reliability in supporting the National Logistics System (SISLOGNAS). It was globally competitive and was a concept of the Sea Toll Road. Inaportnet was an open and neutral electronic portal to facilitate the exchange of data and information on port services in a fast, safe, neutral and easy way that was integrated with relevant government agencies, port business entities and logistics industry players who utilize port services such as shipping lines/agents, freight forwarders, CFS (Container Freight Station), Custom brokerage/PPJK, importers &

exporters, depot containers, warehouses, and inland transportation (trucks, trains and barges) so that port operations are easier, more efficient and effective.

The benefits of this Inaportnet system include a)Single submission; b)Online services, save time and costs; c)Acceleration of the whole process; d)Tracing and tracking capabilities; e)Minimize data and document entry errors; f)Receive electronic data integration; g)Can monitor the process; and h)Increasing the competitiveness of industry players.

In terms of shipping safety guarantees, the existence of the Coast Radio Station (SROP) and Vessel Traffic System (VTS) carried out by the Bitung Class I Navigation District which included 15 SROP and 1 VTS providing services in the form of fixed schedule news broadcasts and news, news broadcasts relay in the form of forwarding news from other stations or forwarding news from ship information deemed important for other vessels in the Bitung VTS working area and information for certain vessels, which according to Bitung VTS assessment are in a situation that could endanger certain vessels or other vessels.

5. Water Entrance dan Inland Transportation

The existence of the water entrance at Bitung Port had existed and had grown together with the existence of the Bitung Port itself. The access of water to the port of Bitung was very possible from all hinterland areas and collecting ports around it. From the shore side, access to the Bitung port was connected to the Trans Sulawesi national road, while the railway transportation mode was currently under construction until 2019 where the route to Bitung was a development priority scale. The development of the Port of Bitung was also supported by the development of the industry in the city of Bitung which consists of PT. Salim Ivomas Pratama (Bimoli Cooking Oil), PT. Semen Tonasa, PT. Delta Pacific Indotuna (Canning Tuna), PT. Agro Makmur Raya and PT. Multi-Vegetable Sulawesi.

6. Existence of Supporting Facilities

Various activities in the port were in the form of loading and unloading activities and raising passengers, completing administrative documents, refueling, repairs, providing supplies, drinking water and smooth service for passengers and the contents of the customs, immigration, quarantine, and customs offices. Port security and representatives or branch offices of shipping and Stevedoring companies are available and ready to support the operational activities of Bitung Port. So did hospitals, it had been registered as hospitals that have received approval from the Director General of Sea Transportation for seafarers' health services including the issuance of Seaman Medical Certificate connected on line with the Indonesian sailor data base system (www.pelaut.go.id)

Conclusions

The six reliability elements that are assessed at Bitung Port have generally fulfilling in supporting the Sea Toll program, except for the Port Productivity element from the aspects of Berth Output (BTP) and Output Gang which experience decreasing trend amount of loading from year to year in the BTP calculation and not achieved of standard Gang Output required for the transport of Containers at Conventional Port. To maximize the reliability element of Bitung Port in supporting the Sea Toll Program launched by the government, it is recommended that a local government study of the flow of cargoes passing through Bitung Port be carried out. Is it caused by a decrease in community purchasing power or a decrease in hinterland resources in Bitung Port BTP values from year to year decreasing. Furthermore, from the port operator, it is possible to evaluate the causes of the low of Gang Output value of container loading in Conventional Wharf whether caused by lack of cargoes flow or due to lack of skills of loading and unloading workers employed or due to inadequate capacity of loading and unloading equipment at the Conventional Wharf.

References

- Gurning Raja Oloan Saut, Budiyanto Eko H Ariyadi, 2007. Management of Port Bussiness (Indonesian Version : Manajemen Bisnis Pelabuhan). APE Publishing, ISBN 451-2345-678906
- Bambang Triatmodjo, 2009. Planning of Port (Indonesian Version : Perencanaan Pelabuhan), Beta Offset Yogyakarta, ISBN 979-8541-04-9
- M. Yamin Jinca, 2011. Indonesia Sea Transportation, The Analysis System and Case Study (Indonesia version : Transportasi Laut Indonesia, Analisis Sistem dan Studi Kasus, Brilian Internasional
- Johny Mailisan, 2014, The Effect of Ships and Cargoes Service to the Loading and Unloading Productivity at Port of Sunda Kelapa (Indonesia version : Pengaruh Pelayanan Kapal dan Barang Terhadap Kinerja Produktivitas Bongkar Muat Pelabuhan Sunda Kelapa), Development and Research Center on Sea Transportation, Ministry of Transportation (Puslitbang Laut Kementerian Perhubungan)



**KEMENTERIAN PERHUBUNGAN
BADAN PENGEMBANGAN SUMBER DAYA MANUSIA PERHUBUNGAN
SEKOLAH TINGGI ILMU PELAYARAN**



CERTIFICATE

No. 065/ICMET/STIP-Jakarta/XI/2018


This to certify that
OKTAVERA SULISTIANA

Has contributed as
PRESENTER

**In The 2nd International Conference on
Maritime Education and Training (ICMET) 2018**

"Analysis of Bitung Port Reliability in Succeeding Sea Toll Program"
Jakarta, November 15th, 2018

Chairman,

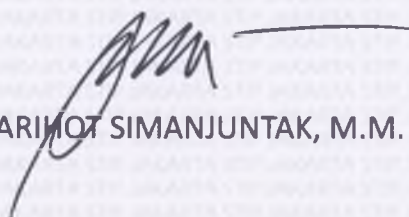
Capt. MARIMOT SIMANJUNTAK, M.M.



**KEMENTERIAN PERHUBUNGAN
BADAN PENGEMBANGAN SUMBER DAYA MANUSIA PERHUBUNGAN
SEKOLAH TINGGI ILMU PELAYARAN**



CERTIFICATE

No. 149/ICMET/STIP-Jakarta/XI/2018

This to certify that
OKTAVERA SULISTIANA

Has contributed as
PARTICIPANT

**In The 2nd International Conference on
Maritime Education and Training (ICMET) 2018**

Jakarta, November 15th, 2018

Chairman,

Capt. MARHOT SIMANJUNTAK, M.M.